LED spotlight C1-S

part number: A400017

description:
LED spotlight for installation in display cases,
360° rotatable, 180° swivelling,
with screw base or magnetic base

housing colour:
aluminum anodised matte in black, silver, gold, champagne
(other surface finishing on request)

optics:
10°, 15°, 20°, 35°, 45°, 80°, 46°+ 10°

light colour (+/- 100K):
~2,700 K, ~3,000 K, ~3,500 K, ~4,000 K, ~5,700 K

high power LED, high CRI DIN EN 55015:2013,
lifetime 50,000 hours | basis of lifetime L80B10

protection class: IP 20, protection class III, CE,
UL Listed No. E506729 - low voltage LED luminaire

luminous flux (~3,000 K | 20° | 500 mA):
~150 lm at ~2.1 W (71 lm/W)

power input:
500 mA (constant current)

allowed LED driver:
LED driver for the Micro Jolly, Mini Jolly,
Maxi Jolly by TCI with constant current
(other LED driver on request)

dimming:
external via potentiometer (incl.)

optional accessories:
honeycomb grid, anti-glare tube, inclined tube,
light diffusion foil, barn doors,
zoom optic (2° - 25°, 6° - 36°)

dimensions

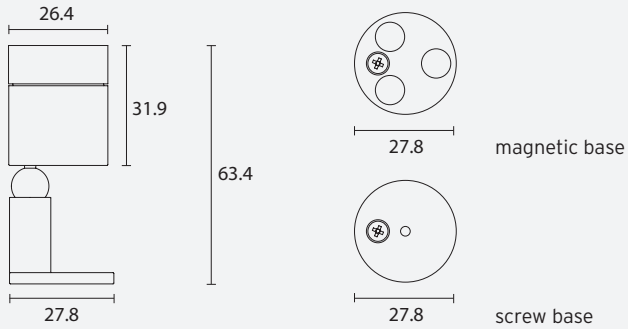

specification in mm

photometry

for light colour ~3,000 K | standard lens 20° | 500 mA | CRI typ. 97, R9 > 90, R12 > 90 | colour variation ≤ 3 SDCM

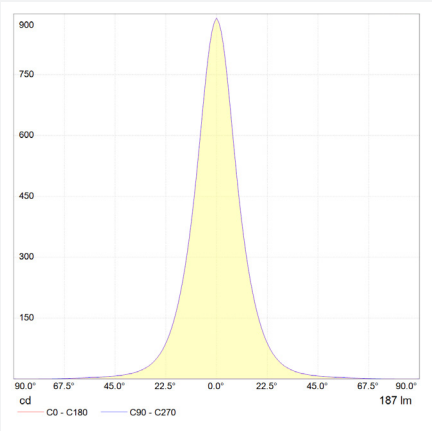

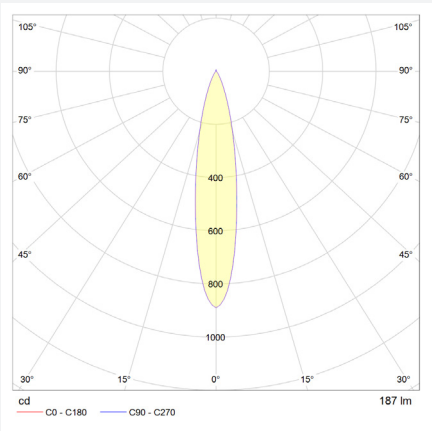

technical changes reserved | July 2023