



LED spotlight C1-WL

part number: A400016

description:

LED wall lamp,
180° rotatable, 180° swivelling

housing colour:

aluminum anodised matte in black, silver, gold, champagne
(other surface finishing on request)

optics:

10°, 15°, 20°, 35°, 45°, 80°, 46°+ 10°

light colour (+/- 100K):

~2,700K, ~3,000K, ~3,500K, ~4,000K, ~5,700K

high power LED, high CRI DIN EN 55015:2013,
lifetime 50,000 hours | basis of lifetime L80B10

protection class: IP 20, protection class III, CE,
UL Listed No. E506729 - low voltage LED luminaire

luminous flux (~3,000K | 20° | 500 mA):

~150lm at ~2.1W (71 lm/W)

power input:

500mA (constant current)

allowed LED driver:

LED driver for the Micro Jolly, Mini Jolly,
Maxi Jolly by TCI with constant current
(other LED driver on request)


dimming:

external via potentiometer (incl.)


optional accessories:

honeycomb grid, anti-glare tube, inclined tube,
light diffusion foil, barn doors,
zoom optic (2° - 25°, 6° - 36°)

dimensions

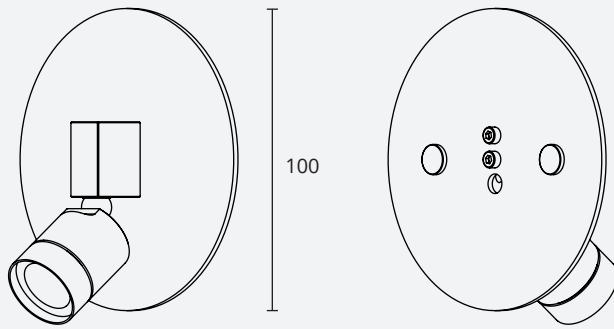

bracket


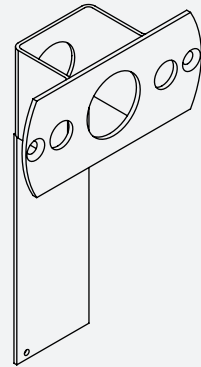


148 x 92.5 x 32
(W x H x D)

specification in mm

photometry

for light colour ~3,000K | standard lens 20° | 500 mA | CRI typ. 97, R9 > 90, R12 > 90 | colour variation ≤ 3 SDCM

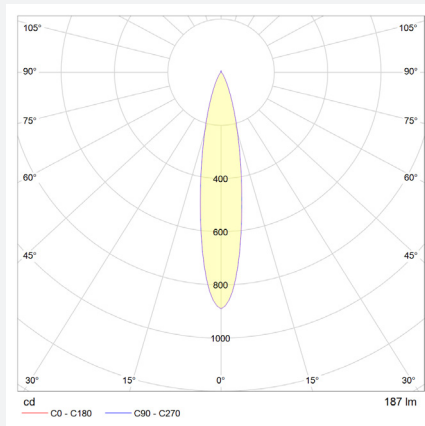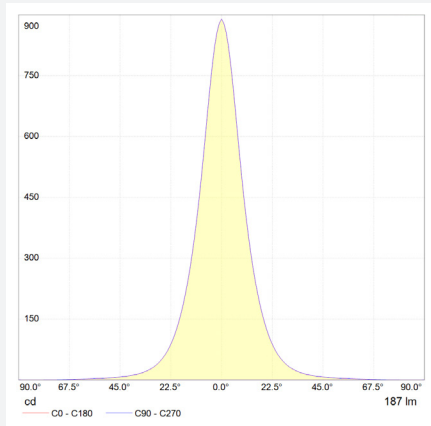

technical changes reserved | July 2023