




## LED light bar R1-T

A400103

<b>description:</b>	LED light bar for table, profile Ø 10 mm, 360° rotatable
<b>housing colour:</b>	aluminum anodised black, silver, gold
<b>LED:</b>	<b>mid power LED, high CRI</b> DIN EN 55015:2013, lifetime 50,000 hours   basis of lifetime L80B10
<b>protection class:</b>	IP 20, protection class III, CE, UL Listed No. E506729 - low voltage LED luminaire
<b>power input:</b>	24V DC (constant voltage)
<b>allowed LED supply:</b>	power supplies by eldoLED or MeanWell with constant voltage 24V DC, class 2 (other power supplies on request)
<b>dimming:</b>	external
<b>optional accessories:</b>	anti-glare profile 13.6 x 13.6 mm, anodised aluminum or powder-coated according to RAL

R1	optic (linear optic satined )	light colour (+/- 100K)	LED	luminous flux (~3.000 K   ~50°)
7 W	~50° and ~60° beam angle	~3,000 K, ~4,000 K	240 LEDs/m (smallest separable unit 25 mm)	~400 lm/m at ~7 W/m (57 lm/W)
15 W	~50° und ~60° beam angle	~2,700 K, ~3,000 K, ~3,500 K, ~4,000 K, Tunable White ~2,700 K - 6,500 K	240 LEDs/m (smallest separable unit 25 mm)	~900 lm/m at ~15 W/m (60 lm/W)
	~70° beam angle	~3,000 K, ~4,000 K	210 LEDs/m (smallest separable unit 25 mm)	~900 lm/m at ~15 W/m (60 lm/W)
20 W	~50° und ~60° beam angle	~3,000 K, ~4,000 K	240 LEDs/m (smallest separable unit 25 mm)	~1300 lm/m at ~20 W/m (65 lm/W)

### dimensions

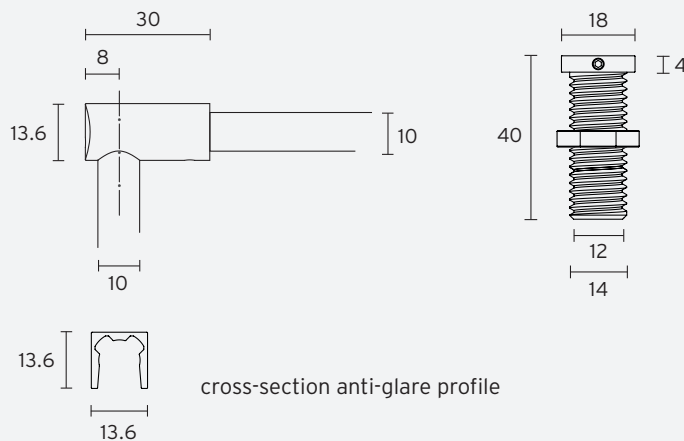

cross-section anti-glare profile

- length: individual cut from 100 mm to 3,000 mm
- center support recommended from 1,200 mm length
- standard extension max. 440 mm (max. visible length 400 mm)
- can be shortened on request
- additional height adjustable via flange
- panel thickness 2 - 23 mm
- borehole  $\varnothing$  14.5 mm

specification in mm

### photometry

for light colour ~3,000 K | linear optics ~50° | CRI typ. 97, R9 > 90, R12 > 90 | colour variation  $\leq$  3 SDCM

